


# Homogeneous Vinyl



PALETTONE PUR

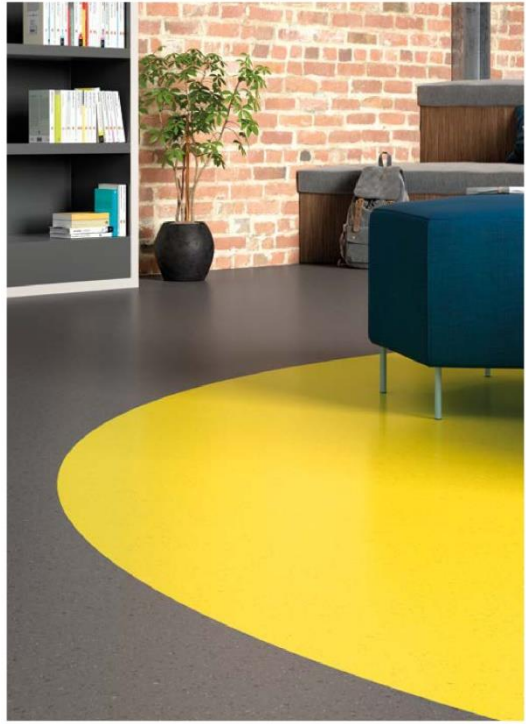

8600  
Deep Space  
LVI 10  
WIS 17000-14

8610  
New Dawn  
LVI 18  
WIS 17000-15  
See page 38

8624  
Freshly Ground  
LVI 02  
WIS 17000-1208

8640  
Earthenware  
LVI 09  
WIS 17000-1208






8032 English Garden  
LW 17  
NCS S 2000-60Y



8033 Woodland Air  
LW 10  
NCS S 1000-62Y

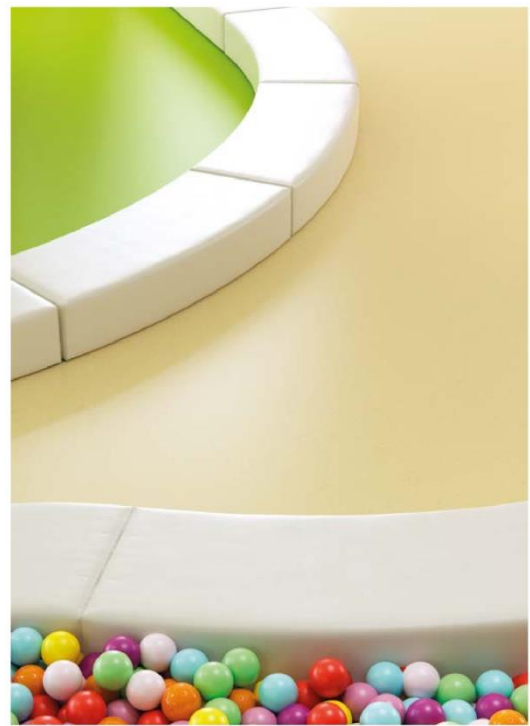

8017 Sunshine Meadow  
LW 06  
NCS S 2000-50Y


8055 Hay Grain  
LW 51  
NCS S 1000-70Y  
See page 38

# PALETTONE PUR

Dove Tail 8607



Frosted Glass, 8606

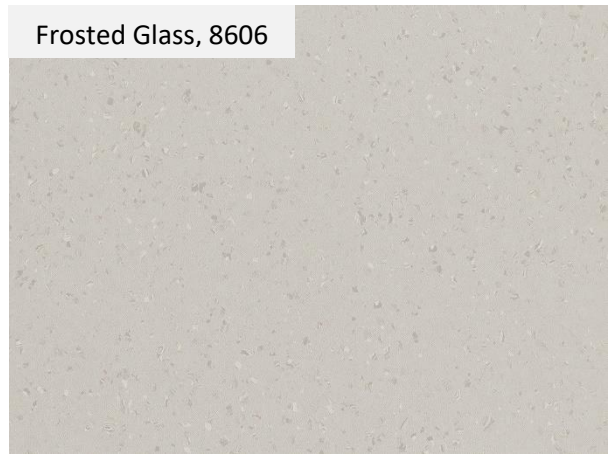

Faded Denim, 8613



Morning Air, 8610




Harvest Air, 8620



Fired Ochre, 8642




Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2




# PALETTONE PUR

Foundation, 8622

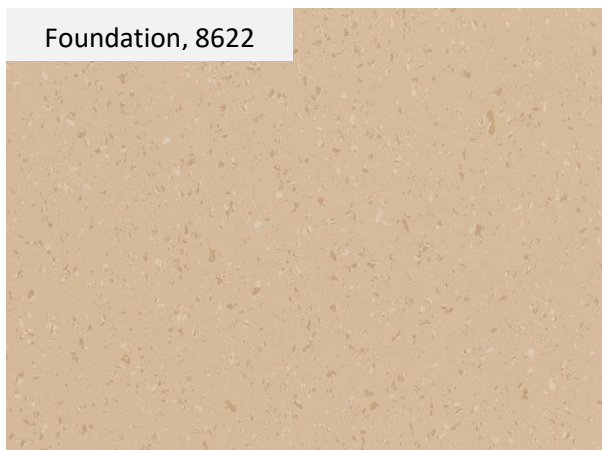

Natural Cotton, 8621

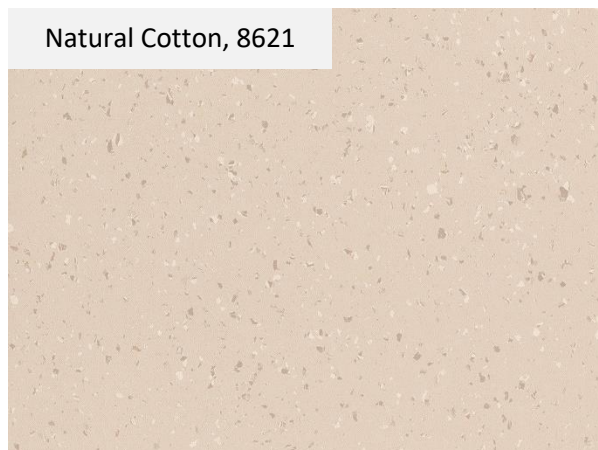


Orchard Walk, 8616



Sugar Candy, 8627




Pencil Lead, 8608

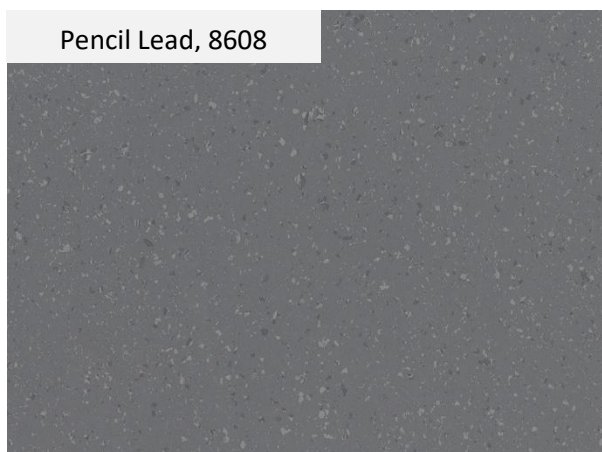

Painters Dream, 8612



Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2



# PALETTONE PUR

Potters Wheel, 8628



Pennyroyal Mint, 8652



Regency Room, 8629




Quarrystone, 8639




Linen Air, 8635



Heritage Hall, 8634

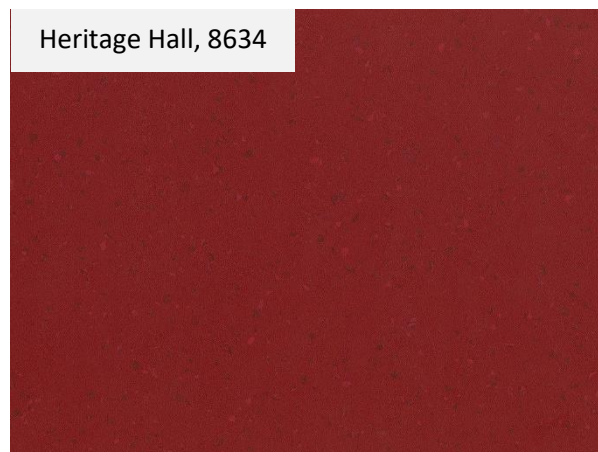

Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2



# PALETTONE PUR

Weekend Sky, 8611




Urban Air, 8605




Dried Tarragon 8644



Earthenware, 8641

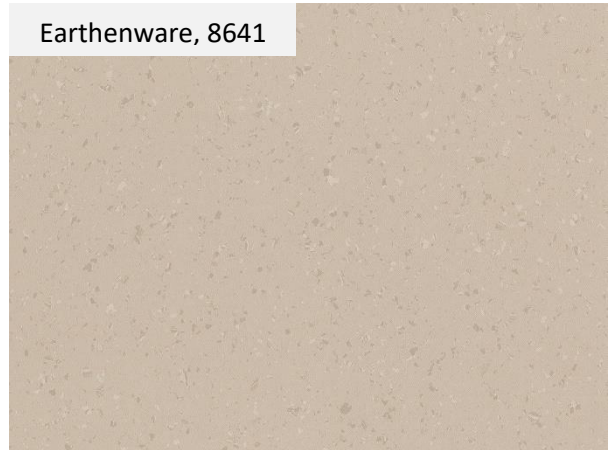


Pecan Crunch, 8646

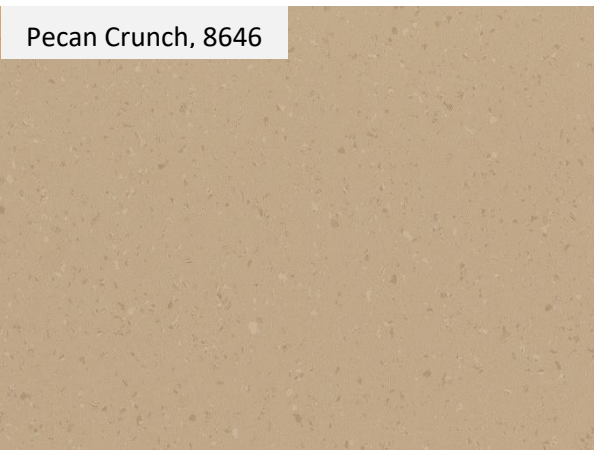

Sahara Storm, 8645



Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2




# PALETTONE PUR


Hay Grain 8655



Sapphire Star, 8649

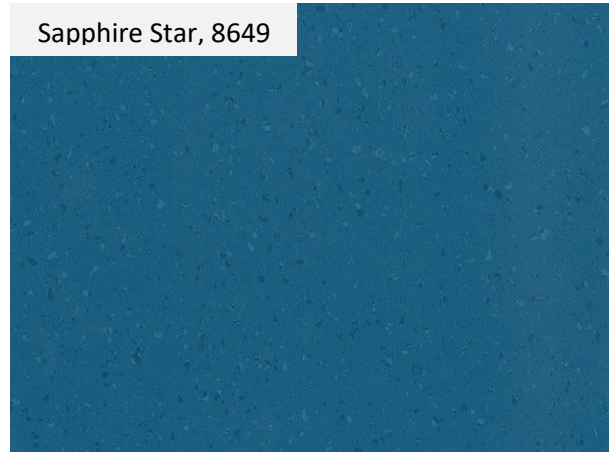

Woodland Air, 8615

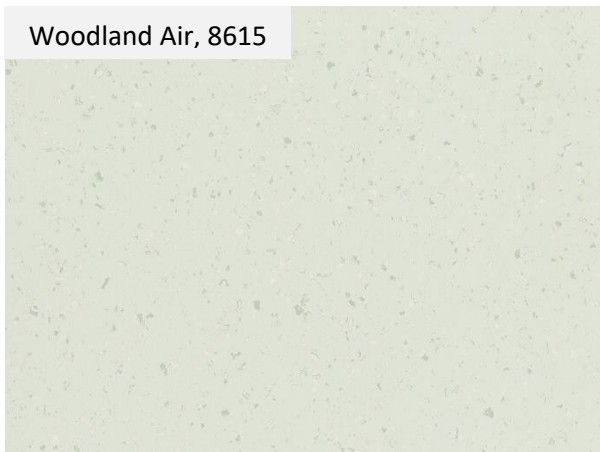

Cool Blende, 8636




Deep Space, 8609



Crisp Apple, 8653



Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2






# PALETTONE PUR


Lily Petal, 8626



Garden Sage, 8643

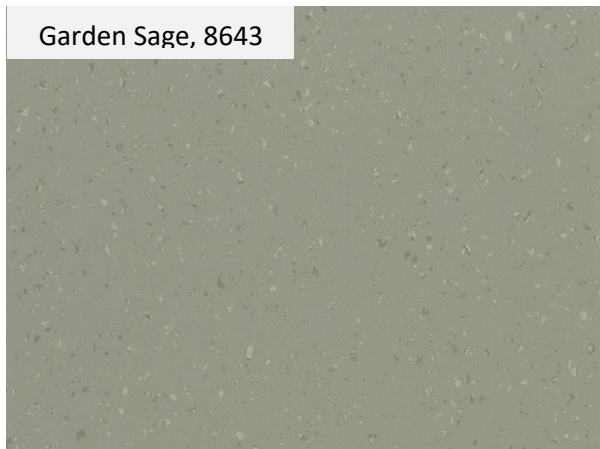


Petrol, 8614

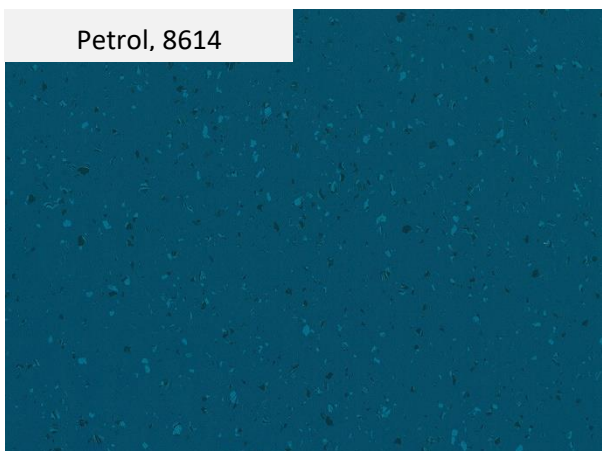


New Dawn, 8630




Superior Sky, 8648

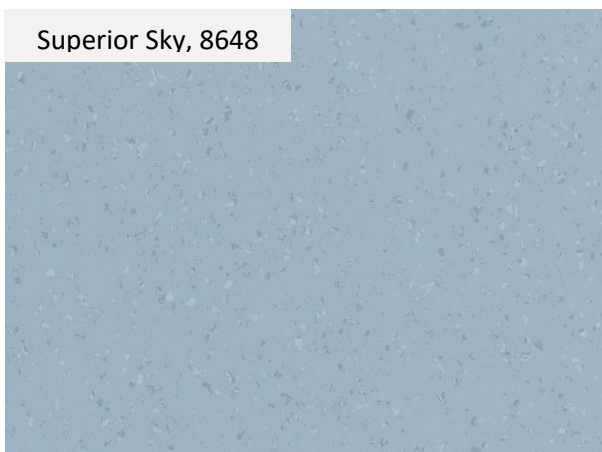

Sunshine Meadow, 8617

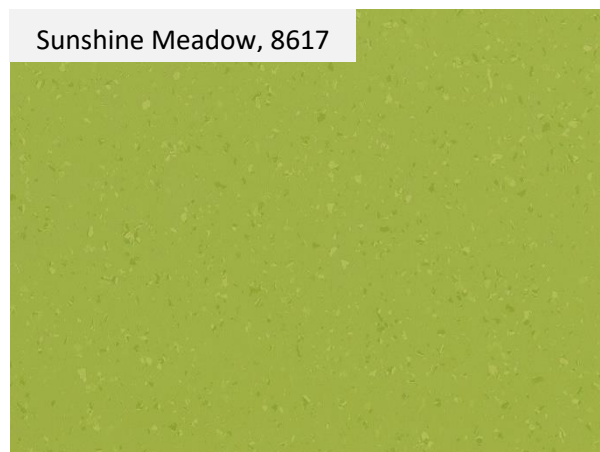

Brand	
Type	PALETTONE PUR
Made In	England
Thickness	2mm
Group	T
Roll length	20 m
Roll Width	2 m
Total Roll /m2	40 m2



























# PALETTONE

Attractive, high performance, heavy duty homogeneous sheet and tile floor covering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a solid colour base with complimentary toned highlights, Palettone PUR is available in a palette of 50 contemporary colours. Demonstrating outstanding durability and abrasion resistance, Palettone PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



	<b>Gauge</b>	ISO 24346 (EN 428)	2.0mm
	<b>Roll Size</b>	ISO 24341 (EN 426)	2m x 20m = 40m <sup>2</sup>
	<b>Tile Size</b>	ISO 24342 (EN 427)	608 x 608mm = 5.17m <sup>2</sup> (12 shades)
	<b>Total Weight</b>	ISO 23997 (EN 430)	2800g/m <sup>2</sup>
	<b>General Performance</b>	EN ISO 10581 (EN 649) ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
	<b>Use Area</b>	ISO 10874 (EN 685)	  
	<b>Reaction to Fire</b>	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 FSV < 300; SDV < 500 >8.0 kW/m <sup>2</sup>
	<b>Abrasion Resistance</b>	EN 660-2	Group T
	<b>Binder Content</b>	EN ISO 10581	Type I
	<b>Slip Resistance</b>	EN 13893 AS 4586 DIN 51130/DIN EN 16165 Ann. B ASTM D2047	Class DS (dry condition) R10 R10 SCOF ≥0.6
	<b>Residual Indentation</b>	ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" (750 psi) ≤0.10mm
	<b>Impact Sound Reduction</b>	EN ISO 10140-3	4dB
	<b>Static Electrical Propensity</b>	EN 1815	≤2.0kV Classified as 'antistatic'
	<b>Resistance to Chemicals</b>	ISO 26987 (EN 423) ASTM F925	Good resistance Good
	<b>Light Fastness</b>	ISO 105-B02	≥6
	<b>Castor Chair (continuous use)</b>	ISO 4918 (EN 425)	Suitable
	<b>VOC Emissions</b>	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification TVOC after 28 days	Eurofins certified product Pass Certified Certified ≤10µg/m <sup>3</sup>
	<b>Responsible Sourcing</b>	BES 6001	Excellent
<p><b>Environmentally Preferable Flooring</b> - Polyflor Palettone PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCARate certified with GreenRate level A - Gold Plus. Genec EN 15804 Environmental Product Declaration (EPD) available on request. Polyflor Palettone PUR is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit <a href="http://www.polyflor.com/sustainability">www.polyflor.com/sustainability</a>.</p> <p><b>PUR</b> - Polyflor Palettone PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.</p>			
	<b>Bacterial Resistance</b>	ISO 846 Part C	Does not favour growth
	<b>Clean Rooms</b>	ISO 14644-1	Class 4
	<b>Ease of Radioactive Decontamination</b>	ISO 8690	Excellent
	<p><b>Hygiene</b> - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.</p>		
	<p><b>Agreement Assurance</b> - Polyflor Palettone PUR has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance the appearance and colour will be retained during this period.</p>		
	<p>Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult <b>Polyflor Customer Technical Services on +44 (0)161 767 1912, or email <a href="mailto:tech@polyflor.com">tech@polyflor.com</a></b>. The data presented is correct at the time of printing. For latest information, please visit our website <a href="http://polyflor.com">polyflor.com</a>. <b>Decoration and shade may vary slightly from the samples shown.</b></p>		
	<p>Palettone SD shadecard also available when static control flooring is required.</p>		



UK sales: +44 (0)161 767 1122    Export sales: +44 (0)161 767 1913  
Samples: +44 (0)161 767 2551    email: [info@polyflor.com](mailto:info@polyflor.com)    [www.polyflor.com](http://www.polyflor.com)

